



NACHI



MACHINE TOOLS

加工機械


爱护人类和环境,追求更高速、更高度化

不二越从开发拉床起步,至今一直在研究开发不断取得进展的生产系统所不可缺少的多种加工机械。

我们通过本公司自己制造的切削工具和加工机械的优良匹配,获得了用户的好评和信任,并且,如准备将(100万分之1mm)级的超精密技术实用化等,我们正在集中综合技术,生产出支持多样化需求、使用方便的加工机械。

目 录

■ 齿轮复合加工中心	3-6	■ 搓齿机	17-18
齿轮复合加工中心	3	搓齿机	17
齿轮复合加工中心 GMS200	5	立式数控精密搓齿机 PFM系列	18
齿轮复合加工中心 GMS450	6	卧式精密搓齿机 PFL-1220B/X系列	18
■ 拉床	7-16	■ 磨床	19-20
拉削加工	7	内磨床 IG系列	19
MQL加工	8	拉刀磨床 NACOM系列	19
高硬加工	9	螺杆磨床 GTE系列	20
硬式拉床 HW-5008	10	生产型螺纹磨床 GTE-SA系列	20
高速精加工拉床 Hi-5010	10	■ 强力抛光机	21-24
小型机械拉床 NBx系列	11	加工系统	21
小型内拉床 NBV系列	11	强力抛光机 MF650	22
立式机械工件移动式拉床 BV-T-MS系列	12	强力抛光机 LF-500/900/2500NC	22
立式工件移动式拉床 BV-T-S系列	12	强力抛光机 LF-1500/1510/1520	23
小型螺旋拉床 NBV-M系列	13	强力抛光机 LF-740/1800	23
螺旋拉床 Hx-T系列	13	小型强力抛光机 LF-250	24
机械立式平面拉床 SV-20-23M	14	端面强力抛光机 SF-70V	24
卧式平面拉床 NSL系列	14	■ 加工中心	25-26
机械转塔拉床 TSL系列	15	MQL高效加工单元	25
筒型拉床 EV系列	15	MQL高效加工单元 DH524/DH514/DH314/GH423	26
立式内拉床 NUV系列	16		
立式平面拉床 NSV系列	16		
小型平面拉床 SV系列	16		

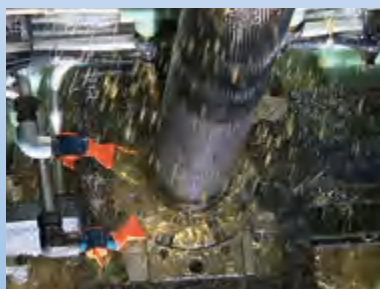

Pursuing advanced high-speed technology that is both user and environmentally friendly

Since producing the first broaching machine in Japan, NACHI-FUJIKOSHI has been developing a wide array of machine tools that are crucial to the continuing evolution of production systems.

The seamless fusion of FUJIKOSHI's cutting tools and machines has received high praise and respect.

Today, FUJIKOSHI is producing easy-to-use machines that support the diverse needs of customers by combining its integrated technologies to make nanometer-order (1 millionth of 1 mm) ultra-precision technology a reality.

I N D E X

Skiving machining center for Gears	3-6	Precision roll forming machines	17-18
Skiving machining center for Gears	3	Precision roll forming machines	17
Skiving machining center for Gears GMS200	5	Vertical precision roll forming machines PFM series	18
Skiving machining center for Gears GMS450	6	Horizontal roll forming machine PFL-1220B/X series	18
Broaching machines	7-16	Grinding machines	19-20
Broaching	7	Internal grinding machines IG series	19
MQL broaching	8	Broach grinding machines NACOM series	19
Hard broaching	9	Thread grinding machines GTE series	20
Hard broaching machines HW-5008	10	Production type thread grinding machines GTE-SA series	20
Highspeed finishing broaching machines Hi-5010	10	Power Finisher	21-24
Small size mechanical broaching machines NBx series	11	Machining System	21
Small size broaching machines NBV series	11	Power Finisher MF650	22
Mechanical table-up type broaching machines BV-T-MS series	12	Power Finisher LF-500/900/2500NC	22
Table-up type broaching machines BV-T-S series	12	Power Finisher LF-1500/1510/1520	23
Small size helical broaching machines NBV-M series	13	Power Finisher LF-740/1800	23
Helical broaching machines Hx-T series	13	Small size Power Finisher LF-250	24
Mechanical vertical broaching machines SV-20-23-M	14	End surface Power Finisher SF-70V	24
Horizontal surface broaching machines NSL series	14	Machining Cell	25-26
Mechanical turret broaching machines TSL series	15	MQL Power Cell	25
Pot broaching machines EV series	15	MQL Power Cell DH524/DH514/DH314/GH423	26
Vertical interior broaching machines NUV series	16		
Vertical surface broaching machines NSV series	16		
Small size surface broaching machines SV series	16		




集车削、钻孔、切齿于一身
 齿轮复合加工中心

齿轮复合加工中心是在旋刮加工机基础上，增加了车削和开孔功能的齿
 轮复合加工机。
 可通过一次装卡加工建筑机械、减速机等齿轮产品，大幅度缩短了非加
 工时间，实现了稳定的加工精度。

特点 Features

- 从车床工序到切齿加工，通过一次装卡加工大幅度缩短了非加工时间，加
 工精度也更加稳定

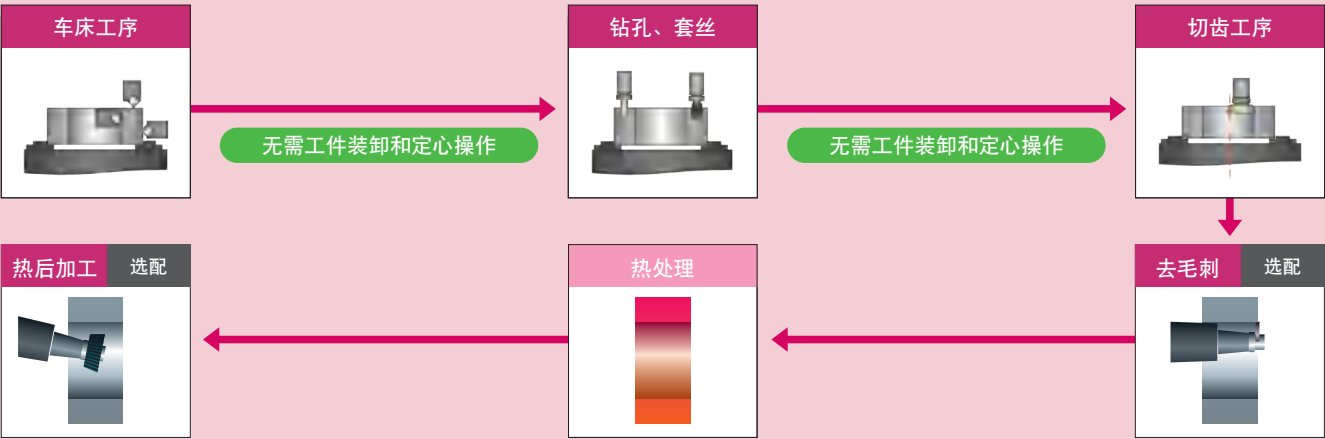

Turning, drilling, and gear shaping combined in one center
 Skiving machining center for Gears

Skiving machining center for gears is a gear skiving machine
 with additional functions of lathing and drilling.
 Reduction gears and gears for construction machinery can be
 made using just one chuck mounting for consistent production
 accuracy and greatly reduced idle time.

- Production accuracy is stabilized and idle time is
 greatly reduced through one-chuck production from
 turning to cutting teeth.

齿轮加工方法特征比较 Comparison of characteristics of gear processing method

			滚齿加工 Hobbing	拉削加工 Broaching	插齿加工 Gear Shaper machining	旋刮加工 Skiving
加工品质 Cutting	生产性	Productivity	◎	◎	△	○
	加工精度	Processing accuracy	○	◎	○	◎
	换型性	Step up	○	△	○	○
	热处理后加工	After the heat treatment processing	○	×	×	○
设备 Machinery	初期投资	Initial investment	○	△	○	○
	针对复合加工的适用性	Combined processing suitability	△	×	×	◎
刀具费 Tool cost	原始成本	Initial cost	○	×	○	○
	运营成本	Running cost	◎	◎	○	○
对象工件 Work	外齿	External gear	◎	×	◎	○
	内齿	Internal gear	×	◎	◎	◎
	盲孔形状（有台阶）	Blind shape (with stepped)	×	×	◎	○
	齿形·齿向修正	Correcting profile and lead	△	×	×	◎

◎:优 ○:普通 △:劣 ×:不适合 ◎:Excellent ○:Good △:Worse ×:Not Used

滚齿加工
Hobbing

面向大批量生产

- 加工时间短
- 刀具费用便宜
- 复合加工设备也可以加工
- 只能加工外齿

For mass production

- Processing time is short
- Low tool cost
- Suitable to machining by combined processing machine
- Only for external gear

拉削加工
Broaching

面向大批量生产

- 加工时间短
- 刀具运营成本便宜
- 刀具初期成本高
- 只能加工内齿

For mass production

- Processing time is short
- Low tool cost in line production
- Initial tool cost is expensive
- Only for internal gear

插齿加工
Gear Shaper machining

面向少量多品种生产

- 可以加工有台阶·盲孔形状
- 可以加工外齿·内齿
- 加工时间长


For large item small scale production

- Suitable for stepped and blind hole shape
- Both internal gear and external gear can be machined
- Long machining time

■ 旋刮加工的机械原理 Mechanism of SKIVING process

使工件和刀具通过交叉角产生滑动摩擦进行刨削加工的加工方法。

Apply crossed axes angle to workpiece and cutter, gear generating machining by sliding

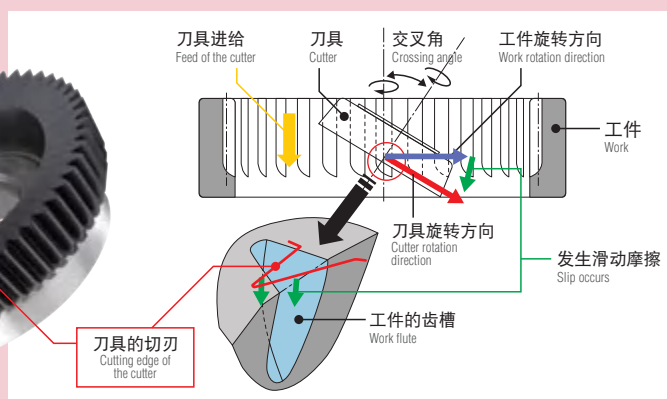

■ 旋刮刀具 Skiving cutter

本公司提供配合工件参数・用途的旋刮刀具以及加工条件的方案。

Propose our skiving cutter and cutting conditions to match the various workpiece specifications and applications.



■ NACHI 刀具的特点 Features of NACHI cutters


- 灵活应用培育至今的齿轮加工技术、刀具设计技术实施切削机械构成解析。实现加工工件的高精度化及刀具的长寿命化。
- 通过表面膜成分设计及成膜过程中合适的表面改质确定了旋刮加工中所必要的表面处理技术。
- 通过硬质合金刀具实现热后的高精度加工。
- Analyzed cutting mechanism with the cutting tool design technology and gear cutting technology that we have developed. Improved precision of machining work and extended tool life.
- Established surface processing technology needed for skiving that produces better surfaces with optimized deposition process and design of coating components.
- Carbide skiving cutters are able to achieve hard skiving process after heat treatment.

■ 刮齿加工操作界面（选配）

Interactive operation screen for skiving (optional)

- 鼓形加工、精加工进给量修正功能（首件）
- 刀具补偿设定、工件坐标设定界面追加刮齿加工条件全部可设定
- Crowning process and run-in amount modification function (initial mode)
- Newly added tool compensation setting and workpiece coordinate system preset

All machining conditions for skiving can be set

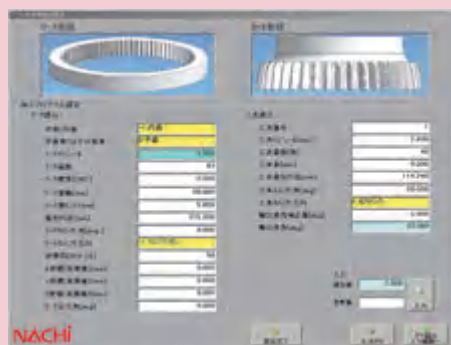

齿轮参数输入界面 Gear specification input screen



刀具补偿设定界面 Tool compensation setting screen

■ 齿圈加工设备系列 Product line-up for ring gear machining



■ 使用 NACHI 机器人实现工件自动上下料 Combine with NACHI robots for auto loading system



齿轮复合加工中心 GMS200

Skiving machining center for Gears GMS200

通用·紧凑 可实现旋刮加工的复合加工机

- 不仅可加工内齿轮、外齿轮，还支持轴工件加工的卧式M/C
- 适于汽车齿轮的加工
- 小型设备对应多工序、多品种
- 硬式旋刮可支持淬火齿轮的高精度加工


General purpose · Compact

Multi-function machine with gear skiving function


- Not only internal and external gears, but also shafts can be processed with this horizontal machine
- Best for gear machining for automotive parts
- Compact equipment with flexibility to cope with the various kinds of small quantity production and multiple processes
- Hard-skiving achieves high-precision machining of hardened gears



GMS200

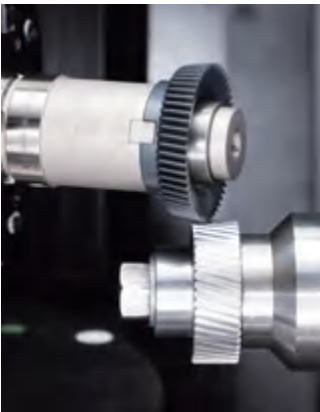

■ 1台设备对应3道工序，安装面积大幅缩减。实现小型化生产线
 To achieve compact production lines by reducing floor space with 3 roles in 1 machine

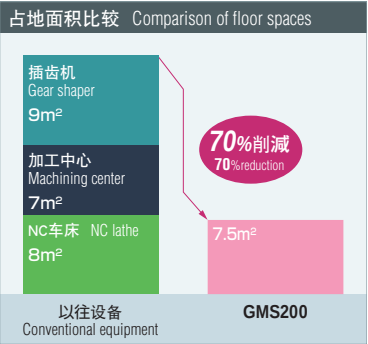

■ 加工事例 Sample



内齿 Internal gear



外齿 External gear



花键 Spline

GMS200		
●加工能力		●Machining performance
工件最大直径 (mm)	Maximum diameter of workpiece	φ220
齿切刀具	Tooth cutting tool	旋刮刀具 Skiving cutter
●工具主轴		●Cutter spindle
主轴锥孔 (刀柄型号)	Spindle taper hole (tool shank type)	KM6350
主轴最高转速 (min ⁻¹)	Max. RPM of spindle (min ⁻¹)	4,000
电机 (30分钟/连续) (kw)	Motor (kw)	26/18.5
●工件主轴		●Workpiece spindle
主轴最高转速 (min ⁻¹)	Max. RPM of spindle (min ⁻¹)	2,400
电机 (30分钟/连续) (kw)	Motor (kw)	26/30
●各轴移动量		●Each unit traverse
左右移动量 (X轴) (mm)	Left-right traverse (X axis)	500
前后移动量 (Y轴) (mm)	Forward - Back traverse (Y axis)	200
上下移动量 (Z轴) (mm)	Up-down traverse (Z axis)	300
刀具回旋角 (B轴) (°)	Tool swivel angle (B axis) (°)	±45

GMS200		
●ATC		●ATC
刀具容纳数量 (只)	Number of stored tools	6
刀具最大直径 (mm)	Max. tool diameter (mm)	φ120
刀具最大长度 (mm)	Max. tool length (mm)	240
刀具选择方法	Tool selection method	位置固定/随机 Tool storage position fixed/random
●NC装置		●NC device
类型	Type	FANUC 31i-B
显示器	Display	FANUC 15寸触摸屏 FANUC 15" touch panel
●实用程序		●Utilities
总消耗功率 (kVA)	Overall power used (kVA)	74
●机器尺寸		●Machine size
宽度×深度 (mm)	Width × depth (mm)	2,500×3,000
高度 (mm)	Height (mm)	1,680
机器质量 (kg)	Weight (kg)	7,000

齿轮复合加工中心 GMS450

Skiving machining center for Gears GMS450

高刚性·小空间 可实现旋刮加工的复合加工机

- 虽然机型小巧，但最大可支持 $\phi 450\text{mm}$ 工件外径的立式M/C
- 凭借高效率的齿轮旋刮加工，大幅缩短加工时间
- 利用特有的技术，确保高刚性和高阻尼性，实现高精度
- 硬式旋刮可支持淬火齿轮的高精度加工

High Rigidity and Space Saving

Multi-function machine with gear skiving function

- Vertical M/C is compact, yet can machine large workpieces up to $\phi 450\text{ mm}$ in diameter
- High efficiency gear skiving greatly reduces machining time
- Proprietary technology produces high accuracy that maintains high rigidity and excellent damping
- Hard-skiving achieves high-precision machining of hardened gears



GMS450




■ 从减少安装空间，到实现更高效生产线

To achieve smart production lines by reducing floor space
利用可节省空间的齿轮复合加工中心，既可将齿轮加工生产线改造成更高效的生产线，还可支持小批量多品种生产和大批量加工等各种生产方式。

Skiving machining center for Gears requires little space to improve gear production lines to be smart production lines that can handle a variety of production formats from multi-type small-lot production to high-volume production.

加工中心 占地面积 7m^2

Machining Center Floor space 7m^2

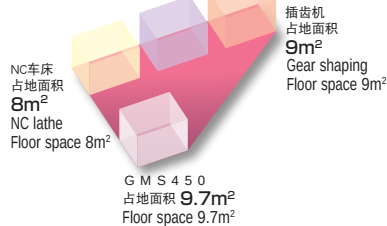

■ 优异的易作业性和易操作性 Superior workability and operability



工件装卸、工艺准备简单

与夹具间的距离短，方便作业者靠近

Simple changeover and loading and unloading of workpieces
Easy access to Jig

■ 加工事例 Sample



内齿轮
 $\phi 450$ 模数3.5
Internal gear $\phi 450$ module, 3.5



摆线齿轮
 $\phi 280$
Cycloid gear $\phi 280$



螺旋内齿轮
 $\phi 160$ 模数1.5
Helical internal gear
 $\phi 160$ module, 1.5

		GMS450
●加工能力		●Machining performance
工件最大直径 (mm)	Maximum diameter of workpiece	$\phi 450$
齿切刀具	Tooth cutting tool	旋刮刀具 Skiving cutter
●工具主轴		●Cutter spindle
主轴锥孔 (刀柄型号)	Spindle taper hole (tool shank type)	7/24锥度No.50 (BBT50)
主轴最高转速 (min^{-1})	Max. RPM of spindle (min^{-1})	3,000
电机 (30分钟/连续) (kw)	Motor (kw)	26/22
●工件主轴		●Workpiece spindle
主轴最高转速 (min^{-1})	Max. RPM of spindle (min^{-1})	1,400
电机 (30分钟/连续) (kw)	Motor (kw)	26/22
●各轴移动量		●Each unit traverse
左右移动量 (X轴) (mm)	Left-right traverse (X axis)	700
前后移动量 (Y轴) (mm)	Forward - Back traverse (Y axis)	350
上下移动量 (Z轴) (mm)	Up-down traverse (Z axis)	300
刀具回旋角 (B轴) ($^{\circ}$)	Tool swivel angle (B axis) ($^{\circ}$)	± 25

		GMS450
●ATC		●ATC
刀具容纳数量 (只)	Number of stored tools	6
刀具最大直径 (mm)	Max. tool diameter (mm)	$\phi 150$
刀具最大长度 (mm)	Max. tool length (mm)	250
刀具选择方法	Tool selection method	位置固定/随机 Tool storage position fixed/random
●NC装置		●NC device
类型	Type	FANUC 31i-B
显示器	Display	FANUC PANEL i
●实用程序		●Utilities
总消耗功率 (kVA)	Overall power used (kVA)	88
●机器尺寸		●Machine size
宽度×深度 (mm)	Width × depth (mm)	2,500×3,860
高度 (mm)	Height (mm)	2,700
机器质量 (kg)	Weight (kg)	22,000

拉削加工

拉削加工是一种能够将需要滚齿机、插齿机和铣床等进行组合加工的零件在短时间内加工出来的加工方法。并且，由于能够使加工精度稳定在很高水平，所以广泛用于汽车制造业等各种产业领域。另外，这种加工方法还被用于发电机制造业和飞机制造业所使用的涡轮盘之类难切削材料的高精度加工，作为现代产业不可缺少的一种加工法倍受瞩目。

World's Top Broaches and Broaching Machines Broaching

Broaching makes it possible to reduce production time on components that require a combination of work on a hobbing press, gear shaver and a milling machine. Also, because broaching has a steady high-level of precision, it can be used for a wide range of production industries such as automobile manufacturing. Because broaching is being used to produce difficult to machine materials like turbine discs used for electric power production and the aeronautics industry, it is garnering widespread attention as an essential element of production in modern industry.



拉削加工的特点 Broaching features

- 能在短时间内加工完成，实现高效生产
- 稳定的高加工精度
- 只要在轴向上相同，即使是复杂且不规则的加工面也能够进行加工
- 良好的精修面
- 极为经济的加工方法
- 不需要熟练的加工技术
- Achieve high-performance through shorter work time
- High-precision machining that is stable
- Complex and irregular machining surfaces are possible as long as the axes coincide
- Superior finished surfaces
- Extremely economical machining method
- Skilled labor not needed for machining





性能和加工例 Performance

[内拉削加工例]

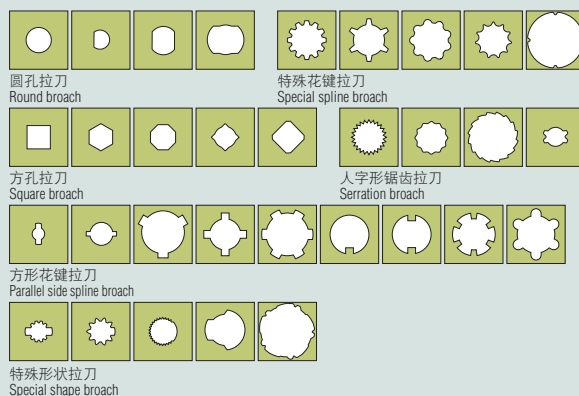

[平面拉削加工例]

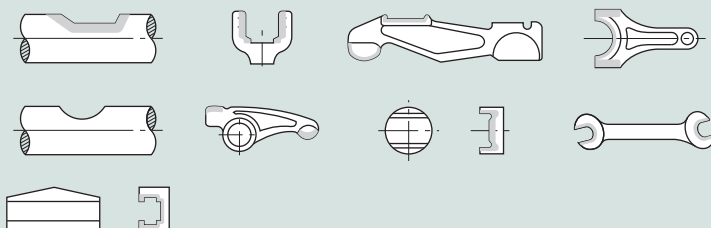

实现拉削加工的MQL化 MQL加工

拉削加工是一种能够以极高的精度和其它加工方法比较困难的高效率将加工对象加工成复杂形状的加工方法，这种加工方法在大批量生产中是不可缺少的。以往在加工时使用了大量的切削油。采用MQL拉床和MQL拉刀，实现了利用MQL的MQL拉削加工。

World's First MQL Broaching. MQL broaching

Able to handle complex shapes with high precision, broaching is an absolutely essential component for large lot production with productivity higher than other machining methods. In the past, broaching required large quantities of cutting fluid, but now the MQL broaching machine and the semi-dry broaching machine are the world's first MQL broaching achieved with mist processing.

MQL加工的特点 MQL broaching features

- 由于减少了冷却液的使用量，改善了作业环境（照片1、2）
- 降低运营成本
- 取消了后洗净工序



■ 照片1 photo1
以往的加工
Conventional
大量使用含有大量氯的油性冷却剂




■ 照片2 photo2
MQL拉削加工
MQL Broaching
通过使环保型的植物油雾化，实现了利用微量供油进行加工

- Reduced quantity of coolant used to improve work environment. (photo1,2)
- Reduced of running cost
- Eliminated of post-cleaning process


性能和加工例 Performance

- MQL加工
- MQL broaching

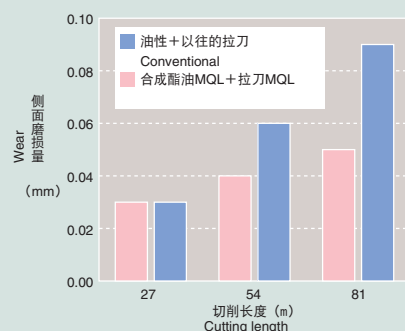

被切削材料 Work	S45C (200HB)
拉刀规格 Broach	m2xPA30xNT16
切削条件 Cutting conditions	切削速度 Broaching speed 5m/min 切削深度 Cutting depth 0.06m/直径


- 扭转刀槽拉刀的实际最大切削负荷
- Maximum cutting load of helix flute broach



MQL拉刀 MQL broaching

- 通过采用新膜涂层和高级拉刀材料，提供了超过湿式加工的长寿命
- 通过扭转刀槽设计，改善了切屑的排出效率，并且降低了切削负荷，实现了振动较少的节能加工
- 大幅改善切屑的回收效率
- New film coating and adoption of high-quality broach materials means tool life is longer than with wet broaching.
- Helix flute design improves chip removal, reduces grinding load, and lowers vibration for great energy savings.
- Chip collection is greatly improved.

MQL拉刀



扭转刀槽
拉刀的切屑
Helix flute

以往的类型



轴直角刀槽
拉刀的切屑
Conventional



以实际加工时间不足1秒的超高效率
实现50～60HRC淬火钢的精加工


高硬加工

拉削加工能够以高精度和高效率将加工对象加工成复杂的形状。为了进一步提高经过上述拉削加工的加工部件的性能，会对其实施热处理。但是，在热处理时会发生热处理变形，所以必须实施磨削精加工。然而，随着超高硬拉刀和高硬拉床的开发，对上述热处理变形的除去加工也成为可能，因此能够实现部件的高精度化和稳定化。

特点 Features

- 高硬度材料的高精度加工
因为能够完全除去硬度为50～60HRC的加工对象的热处理变形，所以能够对之前难以加工的异形孔进行精加工，因此能够实现部件的高精度化和稳定化
- 高效率加工
使用组装式超硬拉刀和高硬拉床，以60m/min的切削速度进行高速加工。实际切削加工时间不足1秒
- 半干式切断
使用微量雾状冷却，环保，无需清洗工件，无需对切屑进行脱油处理，无需进行废液处理

性能和加工例 Performance

	高硬加工前 Before	高硬加工后 After
Appearance 外观形状		
Squareness 垂直度		
Profile 轮廓		
Lead 锥度		

■ 加工规格 Work

齿数 (No. of teeth): 24
齿直角模数 (Normal Module): 1
齿直角压力角 (Normal Pressure Angle): 45°
基准节距圆直径 (Pitch Dia.): 24.000
基础圆直径 (Dia.): 16.971
大径 (Major Dia.): 25.46
小径 (Minor Dia.): 23.76



Finish 50-60 HRC hardend materials and the actual broaching time is less than one second.

Hard broaching

Broaching provides high productivity on complex shapes with superior precision. Components that have been produced by broaching are heat treated to increase functionality. However, heat treatment causes warping that requires finishing grinding. Now, with the development of the super-hard broach and the hard broaching machine, it is possible to eliminate the process to correct the warpage caused by heat treatment. This results in more stable components with higher precision.

- Highly precise broaching of very hard materials (50-60HRC).
- Sectional carbide broach and hard broaching machine are used for a high speed broaching speed of 60m/min. Actual cutting time is less than one second.
- Micro-mist coolant is environmentally friendly, the workpiece does not need to be washed, chip removal is unnecessary, and waste processing is not needed.

■ 销间尺寸 Distance between pins



高硬拉刀 Hard broaching

- 由超硬更换刀片和钻套构成。刀部使用了新开发的超微粒硬质合金，并且实施了TiAlN系的特殊涂层，因此具有优良的耐磨损性能和耐热性能。
- 通过选择正确的前角，改善了刀头强度和耐崩刃性
- 通过重磨前倾面，能够重复使用
- Sectional hard broach consists of carbide blade and a holder. The cutting edge is made from our newly developed micro-grain carbide alloy and coated with TiAlN coating so it has superior friction and heat resistance.
- Optimized front angle improves cutting edge rigidity and chipping resistance.
- Cutting face can be re-sharpened for repeated use.



拉刀外观
Appearance of hard broach

硬式拉床 Hard broaching machines

HW-5008

- 切削速度为1～60m/min。适应硬式拉刀的最佳加工条件50～60m/min
- 通过线性滚子导轨和高刚性的特殊滚珠丝杆，确保高速驱动时的可靠性
- 根据刚性解析，对机器主体、工作台进行优化设计
- 采用工件移动式，降低工件安装高度，提高作业效率
- 无液压系统实现了节省能源、节省空间

- Cutting speed 1-60m/min. Supports most suitable machining condition 50-60m/min a hard broach.
- Secure reliability in high-speed drive with ball screw and linear roller guide.
- Rigidity analysis used to optimize design of main unit and worktable.
- Adjustable worktable improves productivity by lowering height of mounted workpieces.
- Hydraulic components eliminated to save energy and space.

■ 工作台刚性解析
Optimized design by 3D-FEM



HW-5008



■ 加工例 Sample

汽车用齿轮部件等的渐开线花键孔的齿面、CVT球形槽、各种异形孔等
Involute spline hole (gear part for autos),
CVT ball groove, various variant holes

		HW-5008
拉力 (KN)	Pulling force	50
最大行程 (mm)	Max. stroke	800
切削速度 (m/min, 60Hz)	Cutting speed	1~60 (常用60)
回程速度 (m/min, 60Hz)	Return speed	1~60
垫孔径 (mm)	Bolster hole dia.	120
工件最大外径 (mm)	Max. outside dia. of workpiece	280
工件安装面高度 (mm)	Workpiece fitting height	1,000
机器高度 (mm)	Machine height	3,400
占地面积 (mm×mm)	Floor space	1,780×1,900
机器质量 (kg)	Weight	5,700

高速精加工拉床 Highspeed finishing broaching machines

Hi-5010

- 通过组合以往的10倍切削速度和半干拉削，可降低15%的加工成本。
- 采用刀具移动式，还可以对应表面加工

- Ten times the cutting speed of previous models, and semi-dry broaching capability reduces production costs by 15%.
- Surface cutting with movable cutter.



Hi-5010

		Hi-5008/5010	Hi-5014
拉力 (KN)	Max. pulling force.	50	50
最大行程 (mm)	Max. stroke.	800/1,000	1,400
切削速度 (m/min, 60Hz)	Broaching speed.	1~80	1~44
回程速度 (m/min, 60Hz)	Return speed.	1~80	1~44
拉刀升降装置行程 (mm)	Lifter stroke.	400	—
垫孔径 (mm)	Bolster hole dia.	120	—
工件最大外径 (mm)	Max. outside dia. of workpiece.	280	280
主电动机 (kW)	Main motor	AC (交流) 伺服电机 52	AC (交流) 伺服电机 16
机器高度 (mm)	Machine height	2,900/3,300	4,340
占地面积 (mm×mm)	Floor space	1,300×1,700	1,300×2,000
机器质量 (kg)	Weight	3,700	6,000

小型机械拉床 Small size mechanical broaching machines

NBx 系列 series

- 依靠伺服马达高速加工
切削速度2.3倍 6→ 15m/min
工作台往返时间 14→ 6秒
- 通过无液压化实现节省能源、节省空间
- Servo motors mean high speed machining
Cutting speed increased 2.3 times from 6 to 15 m/min
Ram return speed reduced from 14 to 6 seconds
- Hydraulics removed to save energy and space.



NBx-7.5-10

		NBx-7.5-10
拉力 (KN)	Pulling force	75
最大行程 (mm)	Max. stroke	1,000
切削速度 (m/min,60Hz)	Broaching speed	15
回程速度 (m/min,60Hz)	Return speed	Max.27.2
拉刀升降装置行程 (mm)	Lifter stroke	400
垫孔径 (mm)	Bolster hole dia.	120
工件最大外径	Max. outside dia. of workpiece	290
台面高度	Workpiece fitting height	1,475
占地面积 (mm×mm)	Floor space	1,250×2,200
机器质量 (kg)	Weight	2,500

小型内拉床 Small size broaching machines

NBV 系列 series

- 构造简单，节省空间的内拉床
- 从键槽到花键均能高效加工
- Internal broaching machine has simple construction and saves space.
- High productivity from keyway to spline cutting.

加工例 Sample



NBV-5-10A

		NBV-5-6/8/10A	NBV-7.5-8/10/12A
拉力 (KN)	Pulling force	50	75
最大行程 (mm)	Max. stroke	600/800/1,000	800/1,000/1,200
切削速度 (m/min,60Hz)	Cutting speed	1~6.5	1~6.5
回程速度 (m/min,60Hz)	Return speed	14	14
拉刀升降装置行程 (mm)	Broach lifter stroke	400	400
垫孔径 (mm)	Bolster hole diameter	120	120
工件最大直径 (mm)	Max. workpiece dia	300	—
台面高度 (mm)	Table height	1,000/1,200/1,400	1,250/1,450/1,650
主电动机 (kW)	Main motor	5.5	7.5
机器高度 (mm)	Machine height	2,350/2,750/3,200	2,850/3,300/3,900
占地面积 (mm×mm)	Floor space	1,300×1,600	—
机器质量 (kg)	Weight	1,900	2,200

立式机械工件移动式拉床

Mechanical table-up type broaching machines

BV-T-※MS 系列 series

- 对应节省能源，高效率，高精度的机械方式
- 由于此可移动式拉床无需地坑且不使用液压，所以小型，节省空间
- 通过ATC，切削状态的自动调整，对应FMS
- Power-saving, high-efficiency, high-precision mechanical system.
- Hydraulics are not used in this pit-free table-up type.
- Compact, space-saving ATC. Automated setting of cutting conditions helps respond to FMS requirements.

■ 加工例 Sample



BV-T7.5-12M



		BV-T5-8/10MS	BV-T7.5-10/13MS	BV-T10-10/16MS	BV-T12-12MS
拉力 (KN)	Pulling force	50	75	100	120
最大行程 (mm)	Max. stroke	800/1,000	1,000/1,300	1,000/1,600	1,200
切削速度 (m/min, 60Hz)	Cutting speed	6	6	6	7.5
回程速度 (m/min, 60Hz)	Return speed	6	6	6	7.5
拉刀升降装置行程	Broach lifter stroke	450	450	500	500
垫孔径 (mm)	Bolster hole diameter	90	90	127	127
工件最大直径 (mm)	Max. workpiece dia	260	260	300	300
台面高度 (mm)	Table height	950	950	1,050	1,150
主电动机 (kW)	Main motor	5.5	7.5	11	11
机器高度 (mm)	Machine height	2,850/3,050	4,000/4,300	4,200/4,800	4,450
占地面积 (mm×mm)	Floor space	1,500×1,750	2,000×2,000	2,500×3,000	2,500×3,000
机器质量 (kg)	Weight	3,500	5,500	7,500	7,500

立式工件移动式拉床

Table-up type broaching machines

BV-T-※S 系列 series

- 通过无需地坑的工件移动方式，能够容易变线生产
- 作业位置低，维护和操作性超群
- No pit needed so relocating machines in the line is easy.
- Lower working position results in better maintenance and operation.

■ 加工例 Sample



BV-T15-14S



		BV-T5-8/10S	BV-T7.5-8/10S	BV-T10-10S	BV-T15-14S	BV-T20-14/23S	BV-T30-20S
拉力 (KN)	Pulling force	50	75	100	150	200	300
最大行程 (mm)	Max. stroke	800/1,000	800/1,000	1,000	1,400	1,400/2,300	2,000
切削速度 (m/min, 60Hz)	Cutting speed	1~7.2	1~8	1~8	1~8	1~8	1~6.5
回程速度 (m/min, 60Hz)	Return speed	12.5	16	16	24	24	20
拉刀升降装置行程 (mm)	Broach lifter stroke	440	500	500	600	600	700
垫孔径 (mm)	Bolster hole diameter	90	90	90	127	127	140
工件最大直径 (mm)	Max. workpiece dia	260	300	300	300	300	360
台面高度 (mm)	Table height	900	900	1,050	1,150	1,150	1,250
主电动机 (kW)	Main motor	5.5	11	15	22	30	37
机器高度 (mm)	Machine height	2,985/3,385	3,250/3,650	3,650	4,250	4,250/5,650	5,100
占地面积 (mm×mm)	Floor space	1,500×1,800	2,000×2,500	2,300×2,500	2,500×3,500	2,500×3,500	2,800×4,000
机器质量 (kg)	Weight	2,500	4,000	5,000	7,500	8,000	10,000

小型螺旋拉床 Small size helical broaching machines

NBV-※M 系列 series

- 即使螺旋花键的规格不同或是直齿花键加工，也可以自由切换
通过和选配件ATC装置的组合，能够实现自动生产线的柔性生产
- 小型减速机、两轮车离合器的内螺旋齿轮的高效率加工
- 利用紧凑设计实现节省空间
- Flexible production on automated production lines is possible through a combination with the optional ATC which makes it easy to switch between helical splines and straight gear splines with different specifications.
- High-performance machining of compact reduction gears and internal helical gears for motorcycle clutches.
- Compact design reduces space requirements.



NBV-3-6MNC

		NBV-3-6MNC	NBV-5-8MNC
拉力 (KN)	Pulling force	30	50
最大行程 (mm)	Max. stroke	600	800
切削速度 (m/min,60Hz)	Cutting speed	1 ~ 78	1 ~ 8
回程速度 (m/min,60Hz)	Return speed	~ 11	1 ~ 8
拉刀升降装置行程 (mm)	Broach lifter stroke	600	800
垫孔径 (mm)	Bolster hole diameter	90	100
工件最大直径 (mm)	Max. workpiece dia	100	170
螺距控制方式	Lead control	NC控制	NC控制
主电动机 (kW)	Main motor	AC (交流)伺服电机 5.5	AC (交流)伺服电机 5.5
机器高度 (mm)	Machine height	2,671	3,177
占地面积 (mm×mm)	Floor space	1,950×1,900	1,750×2,500
机器质量 (kg)	Weight	2,500	3,000

螺旋拉床 Helical broaching machines

Hx-T 系列 series

- 内斜齿轮的高效加工
- 实现切齿机无法达到的高精度加工
- Internal helical gear can be cut with high accuracy.
- High-accuracy cutting of difficult jobs using gear cutter.

加工例 Sample



Hx-T25-17

		BV-T7.5-12MNC	Hx-T25-17	Hx-T25-20	Hx-T50-20
拉力 (KN)	Pulling force	75	250	250	500
最大行程 (mm)	Max. stroke	1,200	1,700	2,000	2,000
切削速度 (m/min,60Hz)	Cutting speed	1~6	1~10	1~10	1~10
回程速度 (m/min,60Hz)	Return speed	1~8	11.7	11.7	15.5
拉刀升降装置行程 (mm)	Broach lifter stroke	500	450	800	800
垫孔径 (mm)	Bolster hole diameter	127	200	200	186×2
工件最大直径 (mm)	Max. workpiece dia	140	190	190	190
螺距控制方式	Lead control	NC控制	NC控制	NC控制	NC控制
主电动机 (kW)	Main motor	AC (交流)伺服电机 8.2	AC (交流)伺服电机 40	AC (交流)伺服电机 40	AC (交流)伺服电机 60
机器高度 (mm)	Machine height	5,365	4,900	5,400	5,400
占地面积 (mm×mm)	Floor space	2,050×2,925	4,000×4,100	4,000×4,100	7,000×6,300
机器质量 (kg)	Weight	11,000	15,000	20,000	35,000


机械立式平面拉床

Mechanical vertical broaching machines

SV-20-23M

- 用于重切削，高精度的大型拉床
- 通过齿条齿轮传动不需维护
- 提高热刚度，保证高精度
- Large type broaching machine for heavy cutting and high accuracy.
- Rack and pinion drive makes it maintenance free.
- Thermal rigidity is greatly improved and high accuracy is guaranteed.

■加工例 Sample

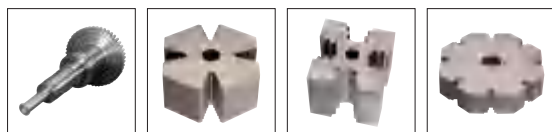

SV-20-28M



		SV-16-28M	SV-20-28M
拉力 (KN)	Pulling force	160	200
最大行程 (mm)	Max. stroke	2,800	2,800
切削速度 (m/min, 60Hz)	Cutting speed	1.5~15	1.5~15
回程速度 (m/min, 60Hz)	Return speed	2~20	2~20
最大NC轴数	Maximum number of NC axes	5	5
主电动机 (kW)	Main motor	AC (交流)伺服电机 60	AC (交流)伺服电机 60
占地面积 (mm×mm)	Floor space	5,000×6,000	5,000×6,000
机器质量 (kg)	Weight	60,000	60,000


卧式平面拉床

Horizontal surface broaching machines

NSL 系列 series

- 可高速高效率加工缸体，涡轮盘等
- 包括机械方式在内，系列产品丰富
- High speed and efficient two-way cutting for cylinder blocks, turbine disks, etc.
- NSL series has a wide selection including mechanical types.

■加工例 Sample



NSL-35-S61M

		NSL-35-D31M	NSL-35-S61M
拉力 (KN)	Pulling force	350	350
最大行程 (mm)	Max. stroke	3,100	6,100
切削速度 (m/min)	Cutting speed	1~30	1~18
最大NC轴数	Maximum number of NC axes	1	4
主电动机 (kW)	Main motor	AC (交流)伺服电机 80	AC (交流)伺服电机 80
占地面积 (mm×mm)	Floor space	10,000×5,000	16,500×7,000
机器质量 (kg)	Weight	45,000	130,000

机械转塔拉床 Mechanical turret broaching machines

TSL 系列 series

- 小型，高效率的往返切削
- 夹具对应多种工件
- 节省能源，节省空间的紧凑设计
- Small design, high efficiency and two way cutting.
- Turret type holder to handle a variety of work.
- Compact design to save energy and space.



TSL-7.5-15

		TSL-2.5-10/12	TSL-7.5-15	TSL-15-23
拉力 (KN)	Pulling force	25	75	150
最大行程 (mm)	Max. stroke	1,000/1,200	1,500	2,300
切削速度 (m/min,60Hz)	Cutting speed	10	11	4~15
工件同时加工件数 (pcs.)	Number of simultaneous procedures	1	1	2
拉刀附着面数	No. of Broach attaching section	2/4	4/6	4
主电动机 (kW)	Main motor	AC (交流)伺服电机 4.4	AC (交流)伺服电机 15	AC (交流)伺服电机 30
机器高度 (mm)	Machine height	2,300	2,800	3,800
占地面积 (mm×mm)	Floor space	2,500×4,300	2,900×5,800	5,300×6,000
机器质量 (kg)	Weight	6,000	15,000	35,000

筒型拉床 Pot broaching machines

EV 系列 series

- 构造简单的上推方式
- 多凹槽周围的加工可一次完成
- 高效率加工的EV系列
- Simple push-up type of construction.
- Multiple grooves on circumference can be cut in one pass.
- EV series for high efficiency cutting.

■ 加工例 Sample



EV-10-8

		EV-10-8	EV-15-11	EV-25-15
拉力 (KN)	Pulling force	100	150	250
最大行程 (mm)	Max. stroke	800	1,100	1,500
切削速度 (m/min,60Hz)	Cutting speed	1~9	1~6	1~7
回程速度 (m/min,60Hz)	Return speed	13.5	8	10
工件最大直径 (mm)	Min. workpiece dia.	90	160	200
主电动机 (kW)	Main motor	18.5	18.5	30.0
机器高度 (mm)	Machine height	3,750	4,500	4,800
占地面积 (mm×mm)	Floor space	2,500×4,100	2,500×4,100	4,200×4,100
机器质量 (kg)	Weight	7,000	9,000	12,000


立式内拉床

Vertical interior broaching machines

NUV 系列 series

- 通用型重切削对应机床
- 能够多轴的大批量生产用
- 能够经受繁重切削的高刚性
- General purpose heavy-duty machinery
- Mass production using multiple axes
- High-rigidity to handle extreme work conditions

■ 加工例 Sample



NUV-20-16

		NUV-10-14	NUV-15-14	NUV-20-16/19	NUV-30-18	NUV-40-23
拉力 (KN)	Pulling force	100	150	200	300	450
最大行程 (mm)	Max. stroke	1,400	1,400	1,600/1,900	1,800	2,300
切削速度 (m/min,60Hz)	Cutting speed	1 ~ 6	1 ~ 8	1 ~ 6.5	1 ~ 6.5	1 ~ 5
回程速度 (m/min,60Hz)	Return speed	15	20	15	15	11.5
拉刀升降装置行程 (mm)	Broach lifter stroke	440	440	540	540	1,000
垫孔径 (mm)	Bolster hole diameter	127	127	170	230	320
工件最大直径 (mm)	Max. workpiece dia	380	380	380	500	520
主电动机 (kW)	Main motor	15	22	22	37	37
机器高度 (mm)	Machine height	4,900	5,000	6,100	6,100	5,850
占地面积 (mm×mm)	Floor space	1,600×2,900	2,400×3,300	2,800×4,800	2,800×4,800	3,500×5,100
机器质量 (kg)	Weight	6,500	8,000	12,000	13,000	24,000



立式平面拉床

Vertical surface broaching machines

NSV 系列 series

- 重切削表面加工机床
- 表面加工专用的高效拉床
- 利用各种夹具和工作台，实现加工的多样化
- 利用高刚性，长期维持高精度
- Heavy-duty surfacing machine
- High-performance broaching machine for surfacing
- Wide variety of operations using jigs and tables
- High rigidity maintains great accuracy over the long term

■ 加工例 Sample



NSV-10-14


		NSV-10-14	NSV-15-17	NSV-20-23	NSV-25-24
拉力 (KN)	Pulling force	100	150	200	250
最大行程 (mm)	Max. stroke	1,400	1,700	2,300	2,400
切削速度 (m/min,60Hz)	Cutting speed	1 ~ 8.2	2 ~ 10	2 ~ 15	2 ~ 18
回程速度 (m/min,60Hz)	Return speed	20	26	31	30
滑枕宽度 (mm)	Ram width	430	430	480	580
主电动机 (kW)	Main motor	15	37	55	37×2台
机器高度 (mm)	Machine height	4,600	4,800	6,760	7,750
占地面积 (mm×mm)	Floor space	2,500×4,500	2,950×5,500	4,300×8,000	5,200×6,500
机器质量 (kg)	Weight	11,000	11,000	17,000	35,000

小型平面拉床

Small size surface broaching machines

SV 系列 series

- 高速切削，高效率
- 最适合小型工件表面的加工
- High speed and high efficiency
- Most suitable for surface broaching of small size workpieces.



SV-3-6

		SV-3-6/9	SV-3-6/9M	SV-5-6/9	SV-5-6/9M
拉力 (KN)	Pulling force	30	30	50	50
最大行程 (mm)	Max. stroke	600/900	600/900	600/900	600/900
切削速度 (m/min,60Hz)	Cutting speed	1~7.2	10	1~7.2	10
回程速度 (m/min,60Hz)	Return speed	12	10	12	10
台面高度 (mm)	Table height	1,000/1,300	1,000/1,300	1,000/1,300	1,000/1,300
主电动机 (kW)	Main motor	5.5	3.7	7.5	5.5
机器高度 (mm)	Machine height	2,800/3,400	3,000/3,300	2,800/3,400	3,000/3,300
占地面积 (mm×mm)	Floor space	1,800/2,000	1,800/2,000	1,800/2,000	1,800/2,000
机器质量 (kg)	Weight	2,500	2,500	2,700	2,700

数秒间将螺丝，
花键和蜗杆精密搓齿成形。

搓齿机

Precision roll-forming of screws, splines and worm shafts in just several seconds

Precision roll forming machines


精密搓齿加工的特点 Features of precision roll forming

一般情况下在数秒内完成加工，与从前的加工相比，其高效率显而易见。由于生成滚形过程，加工时的稳定性高，可获得极好的加工精度和表面粗糙度。搓齿部是沿着搓齿面的组织，与搓齿效果相互结合使强度增加。同一轴上的花键和螺丝等能够通过一道工序加工完成，阶梯轴花键也可以被加工到轴阶梯附近。


Generally, roll forming is completed in a matter of several seconds, which is far more efficient than conventional machining. With roll forming, the machining stability is high, and machining accuracy and surface roughness are extremely good. The structure of the roll formed area is designed to pass along the surface to be rolled, which improves both the roll forming effect and strength. Splines and screws along the same axis can be machined in a single pass, and stepped shaft splines can be machined up to next to the step.

[搓齿加工法]

■ 搓齿机的构造 Rolling machine

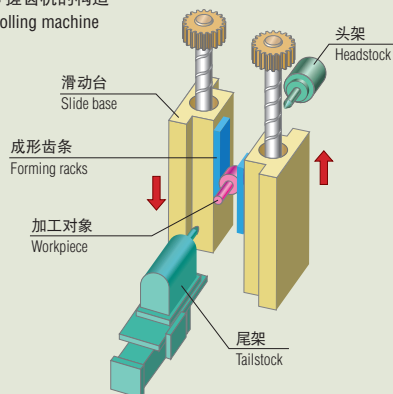

■ 搓齿流程 Rolling process



■ 塑性加工工具 Rolling tools

搓齿刀 Forming rack



■ 搓齿工件 Rolling work



搓齿前 Before



搓齿后 After

有利于环境保护的半干式搓齿 Environmentally friendly semi-dry roll forming

● 有利于环境保护

采用本公司的半干式加工工具和高刚性本体，可实现半干式搓齿

● 节省能源

通过电动驱动方式和半干式搓齿，可降低能源消耗

● 便于工步转换

机械前面开口部较大，便于工具的装卸

● Environmentally friendly

Semi-dry roll forming is achieved by NACHI semi-dry forming rack and highly rigid solid main body of machine.

● Energy saving


Power consumption is reduced by an electric power drive and semi-dry rolling.

● Easy setup change

A wide opening is provided on the front of the machine to facilitate tool mounting and dismounting.

■ 花键齿条的寿命比较

Comparison of spline rack's life

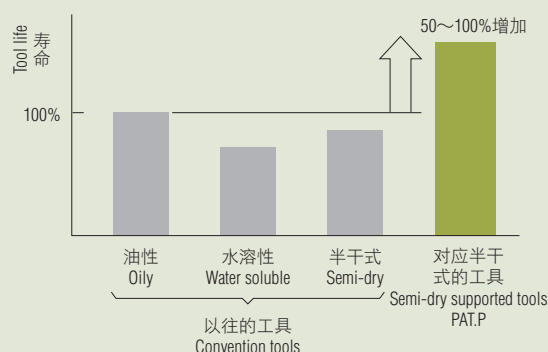

立式数控精密搓齿机

Vertical NC precision roll forming machines

PFM 系列 series

- 稳定和优化搓齿条件，大幅度提高加工精度
- 实现小型化、节省能源和低噪音的数控搓齿机
- Stabilization and optimization of rolling conditions greatly improves machining accuracy.
- Compact energy saving and low noise NC machines



PFM-330E



PFM-610X



PFM-915X

		PFM-330E	PFM-610X	PFM-915X
可搓齿最大加工直径 (mm)	Max. rolling dia.	20	40	40
齿条夹具最大宽度 (mm)	Max. rack holder width	60	145	145
可搓齿最大模数	Max. rolling module	m1.0	m1.30	m1.30
可安装的齿条的最大长度 (mm)	Max. rack length	346	725	1,028
齿条最大移动行程 (mm)	Max. rack stroke	400	800	1,150
开口部尺寸 (mm)	Opening section distance	90	139.7	139.7
占地面积 (mm×mm)	Floor space	800×1,650	1,900×2,800	1,900×2,800
机器质量 (kg)	Weight	2,000	9,000	12,000

卧式精密搓齿机

Horizontal roll forming machine

PFL-1220B (液压驱动) (Hydraulic drive)
PFL-1220X (NC驱动) (NC Drive)



PFL-1220B/X

		PFL-1220B/X
可搓齿最大加工直径 (mm)	Max. rolling dia.	50/55
齿条夹具最大宽度 (mm)	Max. rack holder width	300
可搓齿最大模数	Max. rolling module	m1.75
可安装的齿条的最大长度 (mm)	Max. rack length	1,220
齿条最大移动行程 (mm)	Max. rack stroke	1,600
开口部尺寸 (mm)	Opening section distance	152.4
占地面积 (mm×mm)	Floor space	5,000×6,000/5,800×4,000
机器质量 (kg)	Weight	23,000/2,2000

■ 加工例 Sample

(PFM 系列 / PFL-1220B 通用) (PFM series / PFL-1220B compatible)



内磨床 Internal grinding machines

IG 系列 series

- 对精密部件进行高精度、高效率的内面加工。
生产型的全自动内磨床
- 通过耐热变形的卧式特殊床身结构和安全罩等的特殊设计，有效的抑制磨削热产生的影响。即使在常温下也能够实现稳定的加工精度。无需冷却装置。
- High accurate and efficient internal grinders for precision parts.
- Heat from grinding is suppressed with an improved cover and special horizontal bed configuration that stands up to heat deformation. This means that grinding accuracy remains consistent even at normal temperatures, and cooling equipment is no longer necessary.

加工例 Sample



		IG-06SA	IG-10SA	IG-20SA
能够加工的孔径的范围 (mm)	Grinding bore	10 ~ 60	10~100	10~200
工作台上的振动 (mm)	Swing over table	400	400	400
工作台最大移动量 (mm)	Max. table stroke	185	250	350
工作台最大移动速度 (m/min)	Table speed	20	15	15
进刀机床移动量 (mm)	Cross table travel	150	150	160
工作主轴最大转速 (min ⁻¹)	Max. work spindle revolution	2,200	1,500	1,500
占地面积 (主体) (Wmm×Dmm)	Floor space	1,800×1,640	2,400×2,200	2,700×2,250
机器重量 (kg)	Weight	4,200	4,500	5,000

拉刀磨床 Broach grinding machines

NACOM 系列 series

- 具有拉刀制作方面的丰富经验和技能。
- 借助专有软件和传感器，简化了设置和操作。
- Concentrated know-how and experience in making broaches.
- Streamline setup and operability together with our proprietary software and sensors.



		NACOM-320	NACOM-420	NACOM-426
●工件	●Workpieces			
可加工的拉刀	Broaches that can be machined	方形 Square	方形、圆形和螺旋形 Square, round, and helical	方形、圆形和螺旋形 Square, round, and helical
可磨削的圆形拉刀的最大直径 (mm)	Maximum diameter of round broach that can be ground (mm)	—	180	200
可磨削的圆形拉刀的最大长度 (mm)	Maximum length of round broach that can be ground (mm)	—	1,950	2,540
可磨削的方形拉刀的最大高度 (包括夹具) (mm)	Maximum height (including chuck) of square broach that can be ground (mm)	185	185	185
●移动范围	●Range of movement			
工作台左右移动量 (mm)	Left - Right table traverse (mm)	1,950	1,950	2,380
滑枕前后移动量 (mm)	Ram Forward - Back traverse (mm)	280	280	280
立柱上下移动量 (mm)	Column Up - Down traverse (mm)	260	260	260
磨轮主轴沿垂直轴的内表面旋转角 (°)	Wheel spindle's angle of traverse for internal surface on vertical axis (°)	0~50	0~50	0~50
磨轮主轴沿水平轴的内表面旋转角 (°)	Wheel spindle's angle of traverse for internal surface on horizontal axis (°)	±15	±15	±15
●尺寸	●Dimensions			
安装占地面积 (主机 (宽度mm×深度mm))	Required floor space (main unit (W mm x D mm))	5,800×2,300	5,800×2,300	6,850×2,300
机器高度 (mm)	Machine height (mm)	2,200	2,200	2,200
机器重量 (kg)	Machine weight (kg)	6,000	6,000	8,000

螺杆磨床 Thread grinding machines

GTE 系列 series

- 螺纹磨床可加工各种工件，如滚珠丝杠、注塑螺杆、轧辊模具等等。
- 加工长度可达5,400mm。
- 凭借出色的加工技术，可实现高精度加工。
- Thread grinding machine can process a wide range of workpieces, such as ball screws, injection screws, roll dies, and more.
- Supports lengths up to 5400 mm.
- High-precision machining through excellent machining technology.

■ 加工示例 Sample



GTE-30A


		NEW GTE-7A	GTE-10A	GTE-20A	GTE-30A	GTE-40A	GTE-50A
最大中心间距 (mm)	Max. center distance	800	1,500	2,300	3,650	4,500	5,400
能够磨削的最大外径 (mm)	Max. grinding outside diameter	200	200	200	200	200	200
能够磨削的螺纹长度 (mm)	Grinding lead	700	1,300	2,100	3,300	4,000	5,000
磨石的尺寸 (外径×宽度×内径) (mm)	Grinding wheel size (OD×W×ID)	355×(10~32)×152.4	510×(10~75)×228.6	510×(10~75)×228.6	510×(10~75)×228.6	510×(10~75)×228.6	510×(10~75)×228.6
磨石轴的倾斜角度 (°)	Wheel spindle swivel angle	±45	±45	±45	±45	±45	±45
工作台整体移动量 (mm)	Max. table stroke	700	1,400	2,200	3,400	4,100	5,100
占地面积 (主体) (Wmm×Dmm)	Floor space	3,440×4,200	5,800×4,200	8,000×4,200	10,000×4,200	12,200×4,200	13,900×4,200
机器重量 (kg)	Weight	10,000	12,000	14,000	18,000	19,000	20,000

生产型螺纹磨床 Production type thread grinding machines

GTE-SA 系列 series

- 生产型螺纹磨床可用于汽车及其他产品零部件的小批量或大批量生产。
- 支持零部件的自动化处理，可提高生产效率，节省空间。
- Production type thread grinding machine for small-lot or mass production of automotive and other parts.
- Automate parts for high productivity and to save space.

■ 加工示例 Sample



GTE-5SA2

		GTE-5SA2	GTE-5SA4
最大中心间距 (mm)	Max. center distance	200	400
能够磨削的最大外径 (mm)	Max. grinding outside diameter	250	250
能够磨削的螺纹长度 (mm)	Grinding lead	150	350
磨石的尺寸 (外径×宽度×内径) (mm)	Grinding wheel size (OD×W×ID)	405×(10~32)×152.4	405×(10~32)×152.4
磨石轴的倾斜角度 (°)	Wheel spindle swivel angle	±30	±30
工作台整体移动量 (mm)	Max. table stroke	200	400
占地面积 (主体) (Wmm×Dmm)	Floor space	2,000×2,800	2,400×2,800
机器重量 (kg)	Weight	6,500	7,500

对轴承面进行高精度精加工的加工系统 强力抛光机



加工系统 Machining System

利用硬质石头支撑研磨纸，对曲轴的轴颈轴承部等圆筒面进行高精度的精加工。

Lapping film with a solid backup stone provides high-precision finishing on crankshaft bearings and other cylindrical surfaces.



加工系统（工具图） Machining System (tooling)

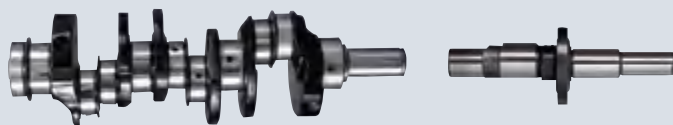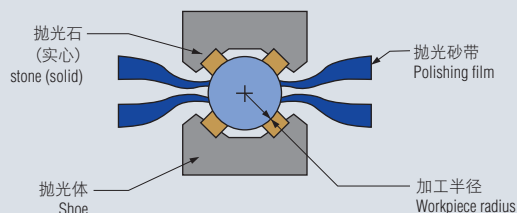

特点 Features

- 能够矫正圆度
因为使用了整体硬式抛光石和非压缩性的抛光带，所以能够矫正圆度。
- 创建高品质的轴承面
利用加工系统的等级II，能够将表面粗糙度提高至 $Ra0.08\mu m$ ($Rz0.4\mu m$)。
- 能够对圆角部进行研磨（拐角R）
使用两端面被切断成弧纹状的研磨纸，能够同样对拐角R部进行研磨精加工。
- 铁氧体帽的除去
除去析出到球状石墨铸铁的表面，会对轴承寿命产生很大影响的铁氧体帽。
- Making true roundness possible
The solid backup shoe and relatively incompressible lapping film improve roundness
- Generating high-quality bearing surfaces
With Machining System's level II, it is possible to improve surface roughness to $Ra 0.08\mu m$ ($Rz 0.04\mu m$).
- Lapping for fillet is possible (corner R)
Lapping finish can be done for corner R by using film cut in a wave shape on both ends.
- Ferrite cap removal
Removal of ferrite caps protruding from spherical graphite cast iron, which have a major effect on the service life of bearings.

圆度的矫正 Roundness correction




加工前
Before machining




加工后
After machining

铁氧体帽 Ferrite cap




100X



400X

除去铁氧体帽后的轴承面 Bearing surface after removing ferrite cap



100X



400X

轴承面
Bearing surface

强力抛光机

Power Finisher

MF650

- 所需空间为原来的55%（与本公司以往机型相比）
- 耗电量为原来的50%（与本公司以往机型相比）
- 滚珠丝杠、线性导轨采用自润滑装置无需进行润滑油日常管理
- 抛光砂带更换、回收全部可以在机器前侧进行
- 连杆颈、曲轴颈可以同时加工的高效率加工系统，更换不同规格曲轴更加容易



MF650

- The required machine space has been reduced to 55 percent (compared to our previous model).
- Power consumption has been reduced to 50 percent (compared to our previous model).
- Use of a self-lubricating device for the ball screw and linear guide eliminates the need for routine lubricating oil management.
- Film can be changed and recovered from the front of the machine.
- Simultaneously working on pins and journals means this high performance machining system makes it easy to change the setup for crankshafts with different specifications.

		MF650
能够加工的最大长度 (mm)	Max. workpiece length	350~630
能够加工的直径 (mm)	Workpiece dia.	φ95
能够加工的宽度 (mm)	Polishing width	15~50
最大行程 (mm)(偏心时)	Max. stroke(Eccentricity)	51.5
支持节距 (mm)	Supported pitch	31~51.5
手臂数 (只)	Number of arms	Max.11

强力抛光机

Power Finisher

LF-500/900/2500NC

- 3轴NC的多种少量生产用
- 利用触摸探头自动检测基准面
- 3 Axis NC is flexible for small volumes and a wide variety of workpieces.
- Automatic datum surface sensing system with touch probe.



LF-900NC

		LF-900NC
能够加工的最大长度 (mm)	Max. workpiece length	900
最大振幅 (mm)	Max. swing	250
能够加工的直径 (mm)	Workpiece dia.	20~100
能够加工的宽度 (mm)	Polishing width	15~50
最大行程 (mm)(偏心时)	Max. stroke (eccentricity)	Max. 60

加工等级 Machining Level

- 加工等级I
使用粒度 # 500 (30 μm) 左右的抛光带, 主要改善圆度。
- 加工等级II
使用粒度 # 1000 (15 μm) 左右的抛光带, 主要改善表面粗糙度。
能够将前加工为 Ra0.5 μm (Rz2.4 μm) 的部件改善到 Ra0.08 μm (Rz0.4 μm) 左右。
- 加工等级III
使用粒度 # 2000 (9 μm) 左右的抛光带, 在等级 I、等级 II 后, 实施本工序, 进一步改善表面粗糙度。
能够将前加工为 Ra0.5 μm (Rz2.4 μm) 的部件最终改善到 Ra0.04 μm (Rz0.2 μm) 左右。

- Machining Level I
Improved roundness due mainly to use of lapping film with a #500 grain (30μm)
- Machining Level II
Improved surface roughness due mainly to use of lapping film with a #1000 grain (15μm)
Components with a pre-process roughness of Ra 0.5μm (Rz 2.4μm) can be improved to about Ra 0.08μm (Rz 0.4μm).
- Machining Level III
By using a lapping film with a #2000 grain (9μm), surface roughness can be even further improved beyond level I and level II.
Components with a pre-process roughness of Ra 0.5μm (Rz 2.4μm) can have their finished surface roughness improved to Ra 0.04μm (Rz 0.2μm).

强力抛光机 Power Finisher

LF-1500/1510/1520

- 曲轴、凸轮轴加工的加工等级Ⅰ、Ⅱ通用机床
 - LF-1500是由1个加工台或左右2个加工台构成的用来加工曲轴和凸轮轴等的通用型机床。
 - 能够将各种轴宽的加工对象加工到加工等级Ⅱ，除了连杆颈、主轴颈部、密封部以外，还能够加工止推面。
 - LF-1520是由1个加工台构成的用来加工凸轮轴的通用型机床。
- Standard machine for Machining level I and II for crankshaft and camshaft machining
 - The LF-1510 is the standard machine for lapping crankshafts and camshafts and can be set up as one station or as two side-by-side stations.
 - LF-1500 can machine a variety of bearings, from pins to main journal bearings to seals and other pieces, and the thrust surface can also be used for machining.
 - The LF-1520 is the standard one station machine for camshaft machining.



LF-1500

		LF-1510	LF-1520	LF-1500
主要的对象工件	Main workpiece	曲轴 Crankshaft	凸轮轴 Camshaft	曲轴/凸轮轴 Crank/Camshaft
加工台数	Number of stations	1个加工台 station	1个加工台 station	1～3个加工台 station
能够加工的最大长度 (mm)	Max. length of workpiece	640	550	640/550
最大振幅 (mm)	Max. swing	240	—	240/—
能够加工的直径 (mm)	Workpiece dia.	φ15～72	φ15～72	φ15～72
能够加工的宽度 (mm)	Polishing width	—	Max. 50	Max. 50
最大行程 (mm)(偏心时)	Max. stroke (Eccentricity)	Max. 60	—	Max. 60/—

强力抛光机 Power Finisher

LF-740/1800

- 加工等级Ⅱ、Ⅲ的凸轮轴、曲轴加工的全自动对应机床
 - 这是由多个加工台构成的自动传送型机床，主要用来加工凸轮轴。
 - 根据刀具布局能够加工到加工等级Ⅲ，凸轮凸角加工自不用说，还可以在同一个加工台进行轴颈加工。
 - 不仅是凸轮凸角、轴颈加工，还可以进行油封和去毛刺加工。
- Fully automatable Machining Level II and III camshaft crankshaft machining
 - Transfer type machine that is configurable in multiple station layouts and is used mainly for camshaft machining.
 - Up to Machining level III machining is possible depending on tooling layout. Course cam lobes and machine journal bearings can be machined at the same station.
 - It's not just for cam lobes and journal bearings; oil seals and burr removal can also be handled.



LF-740

		LF-1800	LF-740
能够加工的凸轮轴的最大长度 (mm)	Max. length of camshaft that can be worked	625	600
能够加工的凸轮底座直径 (mm)	Radius of cam space that can be worked	15～60	20～40
能够加工的凸轮凸角宽度 (mm)	Width of cam lobe that can be worked	10～46	4～30
能够加工的轴颈直径 (mm)	Radius of journal that can be worked	15～72	15～60
能够加工的轴颈宽度 (mm)	Width of journal that can be worked	10～40	10～50


小型强力抛光机

Small size Power Finisher

LF-250

- 用来加工小部件的旋转轴承部
- 也有能够进行内径加工的机床
- For lapping of small parts.
- Machines capable of internal lapping are also available.

■ 加工例 Sample



LF-250

		LF-250
能够加工的部件长度 (mm)	Max. length of workpiece	50~250
能够加工的直径的范围 (mm)	Range of O.D. of workpiece	φ10~70
最大加工宽度 (mm)	Max. microfinishing width of workpiece	40
振动最大速度 (cpm)	Max. speed of oscillation	360
最大转速 (min ⁻¹)	Max. revolution of workpiece	180
加工中心的高度 (mm)	Center height	1,000
占地面积 (mm×mm)	Floor space	1,600×1,200
机床的重量 (kg)	Weight	1,000

端面强力抛光机

End surface Power Finisher

SF-70V

- 用来加工CVT的皮带轮面
- 用来加工小部件的端面
- For CVT sheave surfacing
- For facing of small parts



SF-70V

		SF-70V
能够加工的部件的最大长度 (mm)	Max. length of workpiece	250
能够加工的平面 (mm)	Surfaces that can be worked	内径40 ~ 外径190的范围 40mm inside dia ~ 190mm outside dia
能够加工的平面的角度 (度)	Angles of surfaces that can be worked	6 ~ 16
振动最大速度 (cpm)	Max. speed of oscillation	100
最大转速 (min ⁻¹)	Max. revolution of workpiece	1,000
占地面积 (mm×mm)	Floor space	1,350×1,350
机床的重量 (kg)	Weight	2,000

实现5倍的加工效率，
并且一次加工L/D20深孔

MQL高效加工单元

使用钻头进行深孔加工时，因为切屑的排出性较差，通常必须分段加工。而且，由于切削油无法充分地供给到加工点会缩短刀具使用寿命，并且刀头的振动会产生崩刃或异常磨损等，所以难以提高加工效率。作为深孔加工的代表工艺，有汽车部件曲轴的油孔加工等，通过将MQL强力长柄钻头与专用于该部件的MQL POWER CELL进行组合，能够实现5倍的加工效率。

Realize 5 times the drilling efficiency non-step drilling of L/D 20 deep holes.

MQL Power Cell

Drilling deep holes requires a step process because chips are difficult to remove. On top of that, not applying cutting fluid directly to the cutting point shortens the service life of the cutting edge and vibration may cause damage and uneven wear to the cutting edge. This makes it difficult to increase productivity. Drilling lubrication holes for auto crankshafts is a typical example of deep drilling where using the MQL Power Long Drill combined with the MQL Power Cell improves productivity five-fold.

对曲轴进行的钻孔加工
MQL machining of a crankshaft



切削条件 Drilling condition
HSS长柄钻头 (HSS Long Drill): $\phi 5\text{mm}$
切削速度 [Cutting Speed]: 20m/min
进给速度 [Feed]: 150mm/min

加工时间: 51秒
Work Time 51 second


切削条件 Drilling condition
MQL强力长柄钻头 (MQL Power Long Drill): $\phi 5\text{mm}$
切削速度 [Cutting Speed]: 80m/min
进给速度 [Feed]: 750mm/min

加工时间: 10秒
Work Time 10 second

特点 Features

- 通过一次加工，将加工效率提高至5倍
- Non-step drilling, increases efficiency five-fold



■ 以往的加工 Conventional drilling



■ MQL加工系统 MQL drilling



- 通过加工效率的改善和加工设备的紧凑设计，能够对应多种柔性生产
- Supports flexible production for efficiency improvement and space-saving.

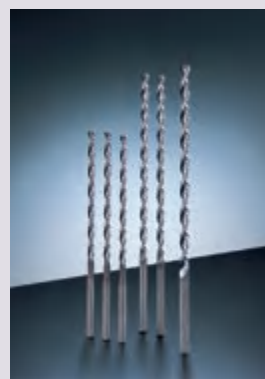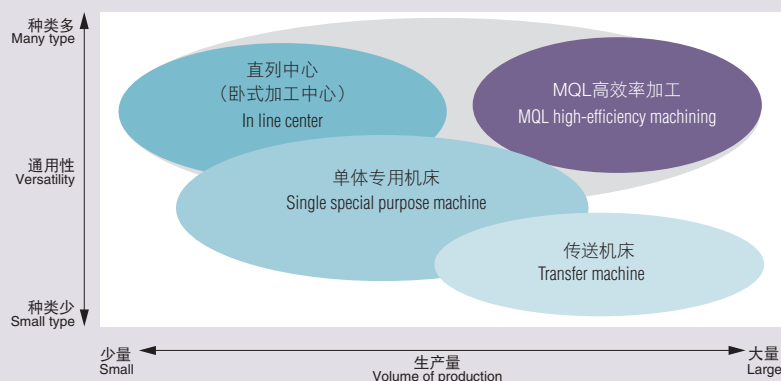

MQL强力长柄钻头
MQL Power Long Drill

加工用途 Work Materials


- 曲轴、齿轮轴、变速箱轴油孔
- Oil holes of crankshafts, pinion shafts, transmission shafts.

MQL高效加工单元 MQL Power Cell

DH524/DH514/DH314/GH423

- 大幅度提高曲轴的钻孔工序的生产效率，对应“MQL加工”，实现节省空间和高效率加工
- Achieving high-performance machining in a small space with support for “MQL Machining” to dramatically improve productivity in crankshaft drilling operations.


■加工例 Sample



DH524

		DH524	DH514/DH314	GH423
●移动				
行程 (X-Y-Z)(mm)	Stroke (X-Y-Z)	500×200×460	500×125×460/340×125×460	475×200×300
快进速度 (X-Y-Z)(mm)	Rapid speed (X-Y-Z)	48×48×48	48×30×48	48×32×48m/min
加减速 (X-Y-Z)(mm)	Acceleration (X-Y-Z)	0.46×0.42×0.82	0.46×0.26×0.82	0.46G×0.36G×0.82G
●主轴				
主轴锥度	Spindle taper	KM6350 or HSK-A63	KM6350 or HSK-A63	KM6350 or HSK-A63
主轴转速 (min ⁻¹)	Spindle speed	~8,000	~8,000	~8,000
主轴电机	Spindle motor	5.5/3.7kwAC主轴电机 Spindle motor	5.5/3.7kwAC主轴电机 Spindle motor	11.0/7.5kwAC主轴电机 Spindle motor
●ATC				
工具收容数量 (支)	Number of stored tools	12	9	20
刀库	Magazine	刀库移动式 Movable magazine type	刀库移动式 Movable magazine type	臂式 Arm type
工具选择方法	Tool selection method	地点固定 Fixed address	地点固定 Fixed address	地点固定 Fixed address
工具最大直径 (mm)	Max. tool diameter	φ90	φ90	φ90
工具最大长度 (mm)	Max. tool length	KM6350···240 HSK-A63···235	KM6350···240 HSK-A63···235	100
工具最大重量 (kg)	Max. tool weight	3	3	5
●机械尺寸				
宽度×深度 (mm×mm)	Width by depth	1,200×4,100	1,200×3,000/1,000×3,000	1,300×3,280
高度 (mm)	Height	2,000	1,570	2,050
机器质量 (Kg)	Weight	3,850	3,000	5,300

碳素加工机床 Carbon processing machine

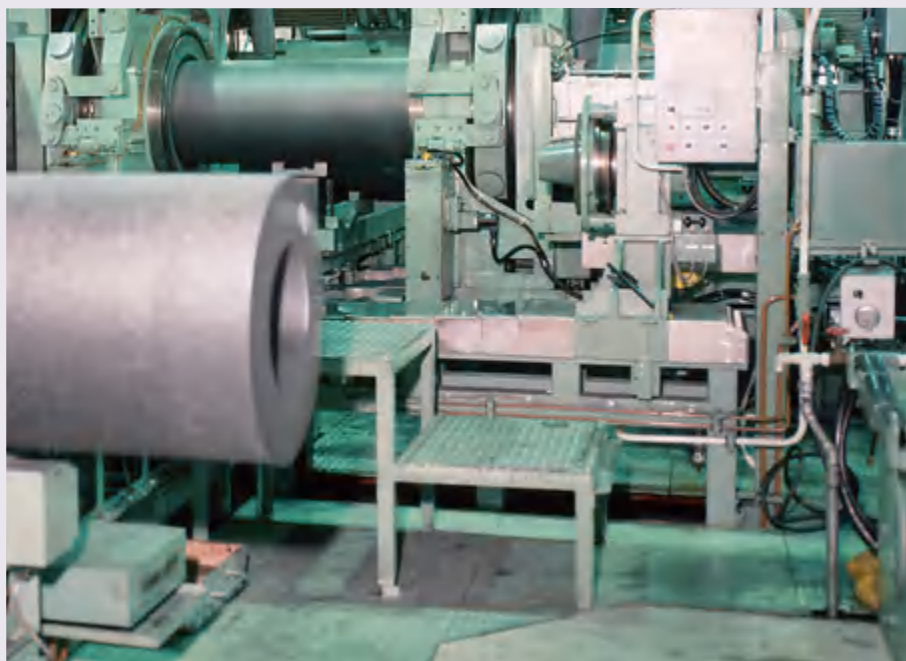



安全注意
事项

- 为了使您安全地使用本机，在设备到货后，请仔细阅读随附“安全指南”。
Before operating any machinery be sure to read through the "Safety Handbook" for your safety.

- 本产品目录所介绍的商品有可能因改进性能不经预告而更改外观和规格等。
- The designs, specifications and/or dimensions in this catalog are subject to change without notice.
- 本册中的数据均来源于不二越内部实验，于特定测试环境下所得（请见各项具体说明）。
- The data in this catalog was obtained from our company's internal experiments and was acquired in a specific test environment (see the specific explanation in each section).

不二越(中国)有限公司

	上海市青浦区诸光路1988号国家会展中心A座5层	邮编 201702	Tel:021-6915-2200	Fax:021-6915-5427
北京分公司	北京市朝阳区朝外大街乙12号 昆泰国际大厦O-1111室	邮编 100020	Tel:010-5879-0181	Fax:010-5879-0182
重庆分公司	重庆市渝北区黄山大道中段67号信达国际D座405室	邮编 401120	Tel:023-8816-1967	Fax:023-8816-1968
沈阳分公司	辽宁省沈阳市沈河区悦宾街1号方圆大厦304室	邮编 110000	Tel:024-3120-2252	Fax:024-2250-5316
广州分公司	广州市高新技术产业开发区科学城南翔二路72号易翔科技园第1栋1、2楼	邮编 510670	Tel:020-8200-6163	Fax:020-8200-6163
武汉分公司	湖北省武汉市武汉经济技术开发区东风三路东合中心D栋402室	邮编 430056	Tel:027-8473-1747	
宁波分公司	浙江省宁波市鄞州区启新路128号G幢	邮编 315000	Tel:0574-8813-5499	
长春事务所	吉林省长春市绿园区景阳大路3333号明翰国际大厦1827室	邮编 130062	Tel:0431-8939-5595	Fax:0431-8939-5595

那智不二越(江苏)精密机械有限公司

中国江苏省张家港市经济技术开发区(南区)南园路39号	邮编 215618	Tel:0512-3500-7611	Fax:0512-3500-7615
----------------------------	-----------	--------------------	--------------------